

DIGITAL DRUM

Setup Guide

Tools required to set up the Digital Drum

1. Craft knife (not included)
2. Phillips tip screw driver(not included)
3. Drum key(included)

Set up procedures

1. Use a craft knife to open the carton packaging, you will see 8 boxes packed neatly in the carton, includes: BASS DRUM PEDAL; EMPTY BOX; HI-HAT PEDAL; ACCESSORIES; DRUM MODULE; CYMBAL 3PCS; DRUM PADS 2PCS. (see figure 1)



figure 1

2. Take all the 8 boxes out, you will see 6 sections where 8 tubes are placed, these tubes will be combined together to become the frame of the digital drum set.(see figure 2)



figure 2

3. Open the ACCESSORIES box, you will see a Drum Key, as shown in figure 3.



figure 3

4. Take the two Leg 560mm Straight Tubes with rubber feet (see figure 4), and move the clamp to the center position (see figure 5).



figure 4



figure 5

5. Get two Vertical 860mm Straight Tubes, as shown in figure 6, then use the Drum Key to adjust the clamps to a suitable position (see figure 7&8 for reference).



figure 6



figure 7



figure 8

-
6. Fit the Vertical 860mm Straight Tubes all the way into the clamp on the Leg 560mm Straight Tube, use the Drum Key to tighten (see figure 9&10).



figure 9



figure 10

-
7. Fit the 1050mm Tube into the clamps on the Vertical 860mm Tubes, use the Drum Key to tighten, you may need further adjustment (see figure 11)

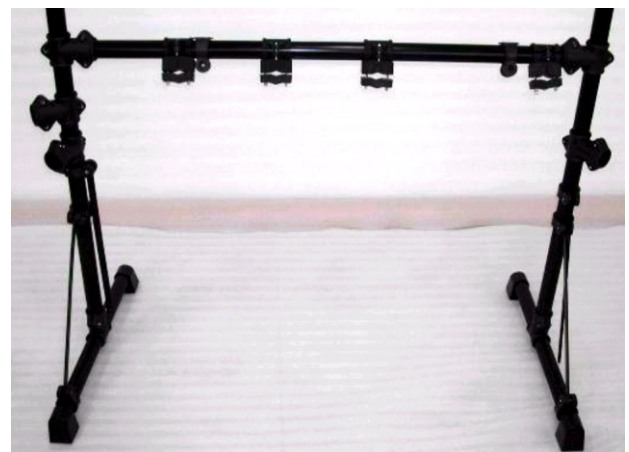


figure 11

8. Locate and tightened the three Cymbal Rods (see figure 12) onto the frame complete in the last step (see figure 13).



figure 12



figure 13

9. Get the Cymbals from the CYMBAL 3PCS box and fit onto the Cymbal Rods, use the Drum Key to tighten (see figure 14).



figure 14

10. Get 5 Knurled Rod from the ACCESSORIES box, Drum Pads from the DRUM PADS box, the Drum Module from the DRUM MODULE box, and fit each part onto a Knurled Rod(see figure 15&16), tighten to screws on the Drum Pads (see figure 17), then fit onto the frame (see figure 18).



figure 15

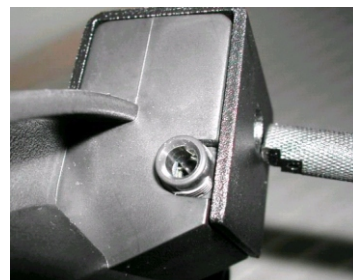


figure 16



figure 17



figure 18

11. Unpack the BASS DRUM PEDAL box and take the Pedal and Drum Pad, then get a pair of Steel Rods from the ACCESSORIES box, and fit onto the back of the Bass Drum Pedal unit completed (see figure 19&20)
Attach the Drum Pedal to the Drum Pad, tighten with the wing screw.(see figure 21&22).



figure 19 - loose the screws on the back



figure 20 - fit the steel rods and tighten with screws.

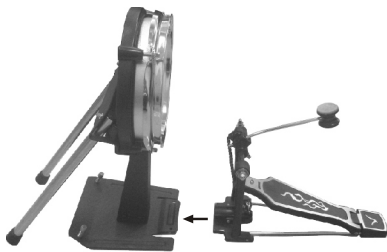


figure 21 - Loosen the wing screw on the pedal, Attach the Pedal to the Drum Pad.



figure 22 - Locate the pedal to the proper position and tighten with wing screw.

-
12. Get the Hi-hat Pedal from the HI-HAT PEDAL box, put it on the left of the Bass Drum Pedal, as in figure 23.

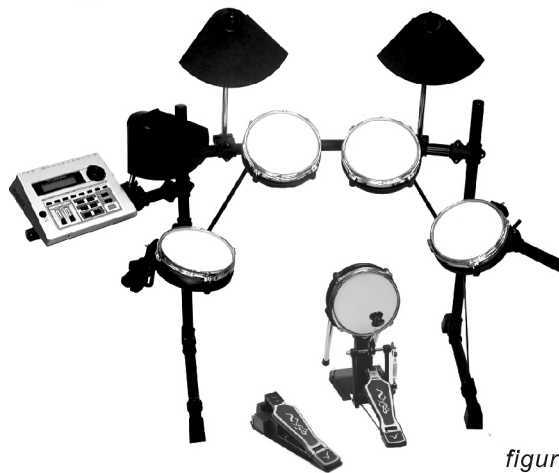


figure 23

-
13. Adjust the front angle and height of each drum pad to the position that you feel most comfortable.
-

14. Finally, take the Cable Harness from the ACCESSORIES box, and make the connection refer to the instruction manual.