

Setup Guide


WARNING:

- Drum key can be pinched when adjusting clamps with drum key. Operate carefully.
- Be careful around pipe ends, inside the pipe and screw ends. Metal shavings, etc. May injure your fingers.


1 Check the include items

CYMBAL PADS BOX


Cymbal Pad for Hi-Hat



Cymbal Pad for Ride




Cymbal Pad for Crash




HI-HAT PEDAL BOX

Hi-Hat Control Pedal




DRUM PADS BOX

Tom Pad x3




Snare Pad



BASS DRUM BOX

Bass Drum Pedal



ACCESSORIES BOX

Cymbal Holder x3




Drum Key



Snare L - Metal Rod X 1
(Length:165mm)



Drumsticks




Hexagon Key



Tom&Module L - Metal Rod X4
(Length:110mm)



AC Adaptor



Owner's Manual



Setup Guide



Connection Cable X 9




Handscrew X 2




DRUM MODULE BOX

Drum Module




STAND AND CYMBAL HOLDER BOX

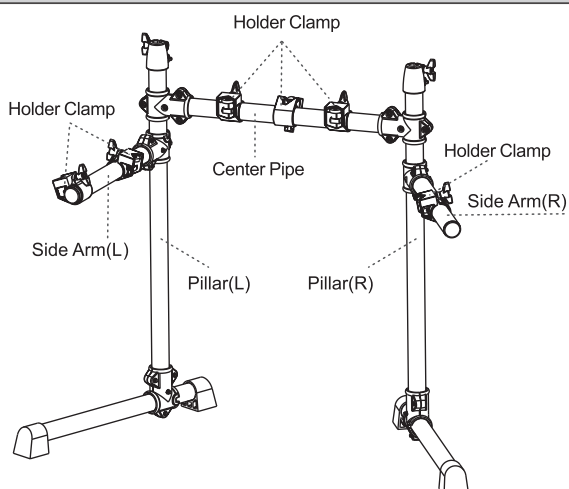

2 Attach the Parts





Attach the Pads

1. Loosen wing nut on the holder clamp, which is on the center pipe, Side arm(L) and Side arm (R).
2. Insert the Snare L-Metal Rod into the holder clamp on the Side arm(L), then insert the Tom&Module L-Metal Rod into the holder clamp on the Center Pipe and Side Arm(R), tighten wing nuts on the holder clamp.
3. Attach drum pads to the Snare L-Metal Rod and the Tom&Module L-Metal Rods then tighten wing nuts, Repeat for each pad.

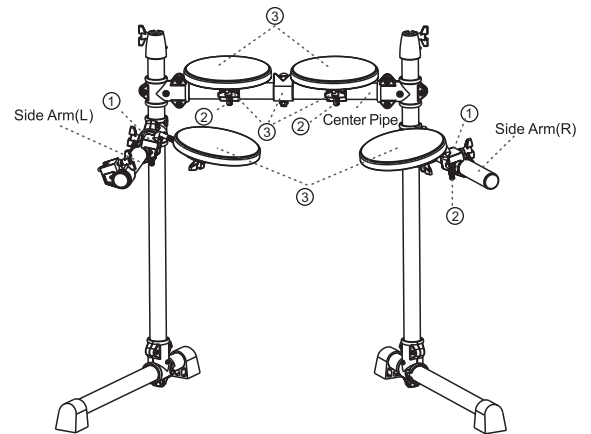

Attach the Cymbal Pads


1. Loosen wing nut on the holder clamp on pillar(L), pillar(R), and side arm(L).
2. Insert each cymbal holder into pillar(L), pillar(R), side arm(L), and tighten wing nut.
3. Remove wing nut and felt washer from cymbal tilter.
4. Place cymbal pad on tilter assembly. Re-attach the felt washer and wing nut. Tighten wing nut.

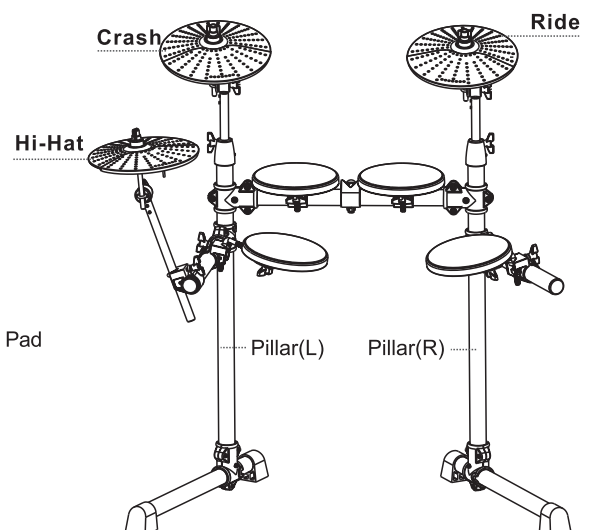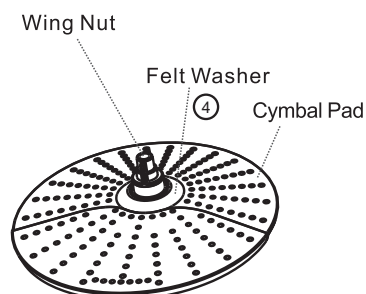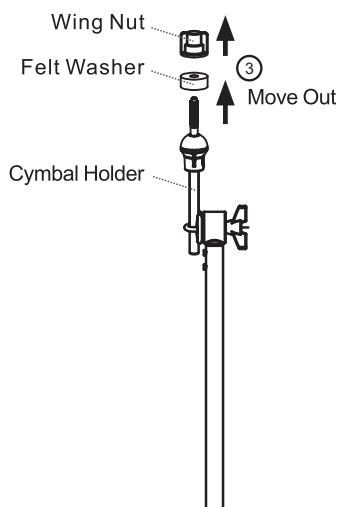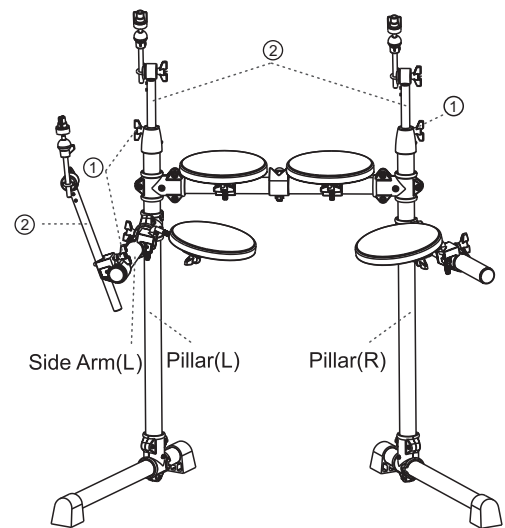

3 Connect the Pads to the Drum Module

Attach the Drum Module

1. Loosen wing nut on the clamp, which is on the center pipe.
2. Insert the "L-Metal Rod" to the clamp.
3. Insert the drum module to the L-Metal Rod.
4. Tighten the wing screw on the clamp.

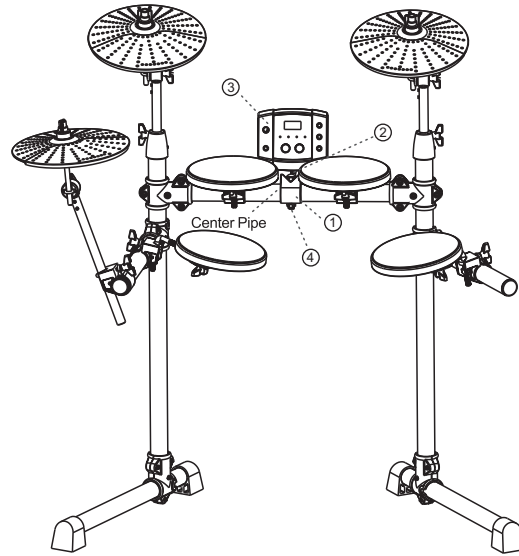

Connection Procedure

1. Place the pedal on the floor on your left side.
2. Place the bass drum pedal on the floor in the center of rack.
3. Please connect the clearly marked cables from the pads to the correct inputs on the drum module.

Are you ready? Let's enjoy playing it.

