






























# Setup Guide

**WARNING:**


- Drum key can be pinched when adjusting clamps with drum key. Operate carefully.
- Be careful around pipe ends, inside the pipe and screw ends. Metal shavings, etc. May injure your fingers.

1

## Check the include items

|   |   |
|---|---|
| <div><b>CYMBAL PADS BOX</b></div> <div>Cymbal Pad for Hi-Hat      Cymbal Pad for Crash(with Choke)      Cymbal Pad for Ride (with Chock)</div> <div></div>  | <div><b>HI-HAT PEDAL BOX</b></div> <div>Hi-Hat Control Pedal</div> <div></div>   |
| <div><b>DRUM PADS BOX</b></div> <div>Tom Pad x3      Snare Pad (Dual Zone)</div> <div></div>   | <div><b>DRUM MODULE BOX</b></div> <div>Drum Module</div> <div></div>   |
| <div><b>ACCESSORIES BOX</b></div> <div>Hi-Hat Holder      Drum Key      Pad Mount X 4      Drumsticks</div> <div></div> <div>Screw X 3      Connection Cable X 9      Owner's Manual      Setup Guide</div> <div></div> <div>AC Adaptor</div> <div></div>                   | <div><b>KICK PEDAL BOX</b></div> <div></div> <div>Foot Pedal      Beater</div> <div><b>AFI</b></div> <div></div> |
| <div><b>STAND AND CYMBAL HOLDER BOX</b></div> <div></div> <div>Pillar (L1)      Pillar (R1)      Pillar (M1)      Cymbal Holder x 3</div> <div></div> <div>Center Pipe (1)      Right Cross Pipe      Center Pipe (2)      Left Cross Pipe      Cymbal Rod Clamp</div> |   |


## 2 Set Up the Stand

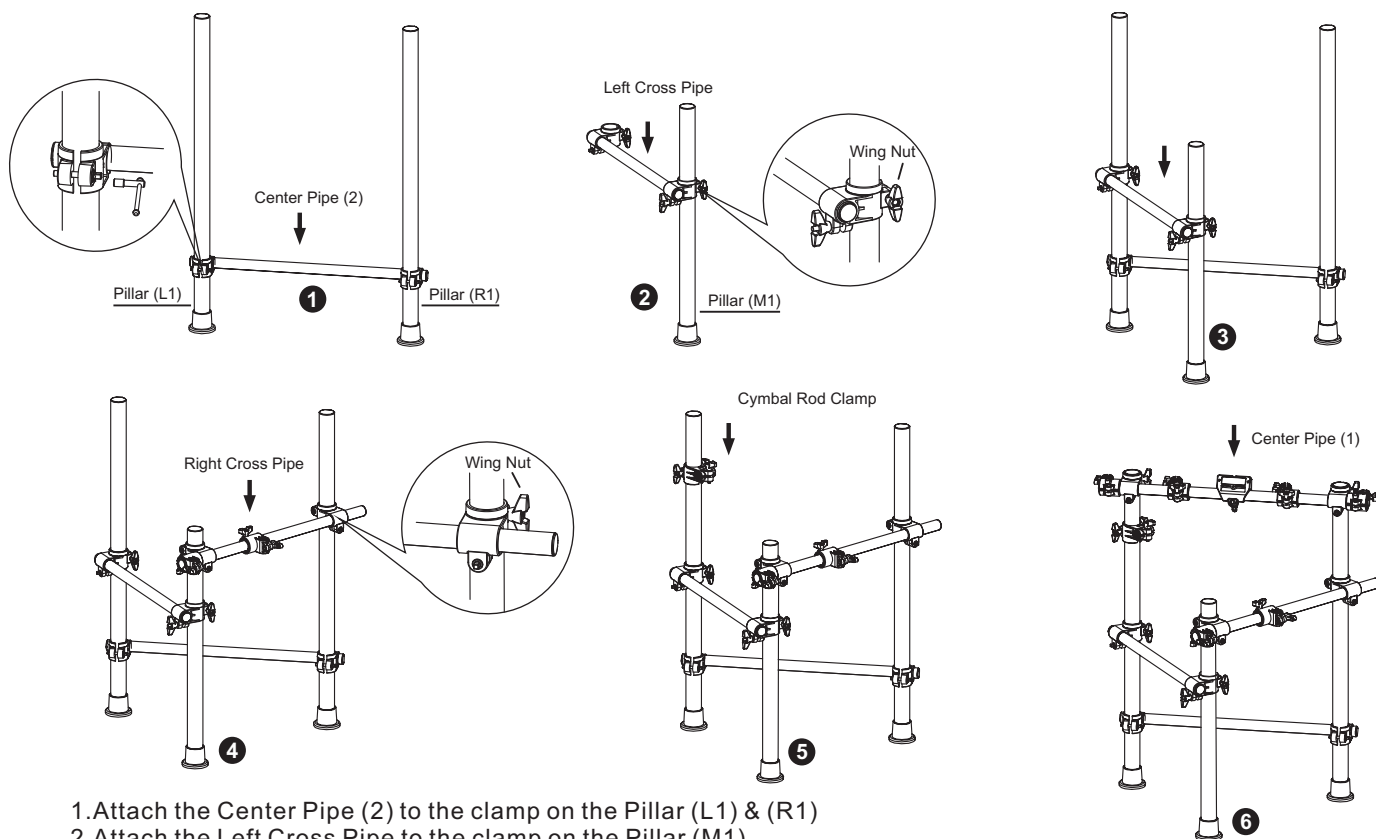

1. Attach the Center Pipe (2) to the clamp on the Pillar (L1) & (R1)
2. Attach the Left Cross Pipe to the clamp on the Pillar (M1)
3. Attach the Left Cross Pipe to the clamp on the Pillar (L1)
4. Attach the Right Cross Pipe to the clamp on the Pillar (R1) & (M1)
5. Attach the Cymbal Rod clamp on the Pillar (L1)
6. Attach the Center Pipe (1) to the clamp on the Pillar (L1) & (R1)

### Note:


- Loosen or tighten the screws on the clamp with drum key as shown partial enlargement.
- Adjust the height of the Right Cross Pipe and Center Pipe (1) with Wing Nuts as needed.

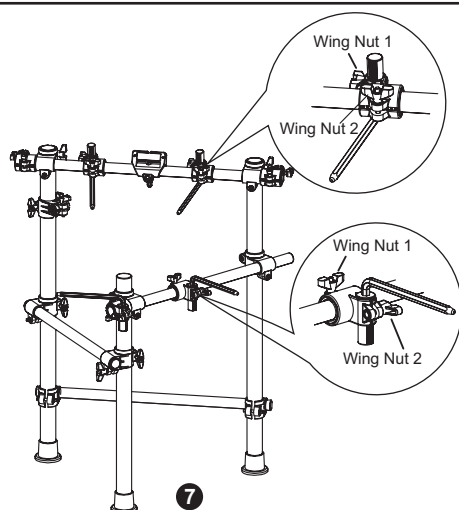

7. Attach the pad mounts to the mount holders on the Center Pipe (1), Right Cross Pipe, and firmly tighten the respective wing nuts 1.

### Note:

- Loosen or tighten the wing nuts on the mount holder as shown partial enlargement.
- Move the mount holders as needed, and firmly tighten the respective wing nuts 2.

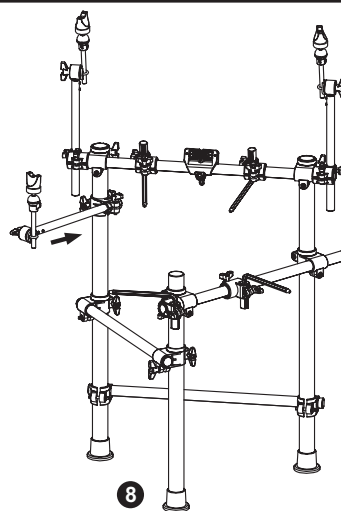

8. Insert the two cymbal holders into the holders on the Center Pipe (1) Clamp, attach the hi-hat holder to mount holders on the Cymbal Rod Clamp, and firmly tighten the respective wing nuts.


### Note:

- Loosen or tighten the wing nuts on the mount holder as shown partial enlargement.

### 3 Attach the Parts

#### Attach the Pads

1. Loosen the wing nuts on the drum pads.
2. Attach the drum pads to the pad mounts, and firmly tighten the wing nuts on the drum pads.

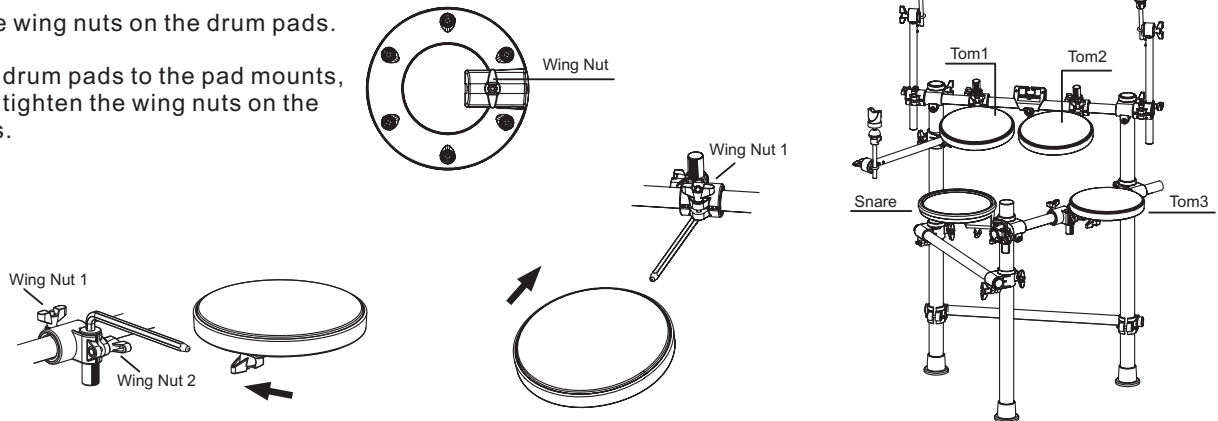


#### Attach the Cymbal Pads

1. Remove the wing nut and felt washer from the cymbal tilter.
2. Place the cymbal pad, felt washer, wing nut 3 assembly as shown, and tighten the wing nut 3 to obtain an appropriate amount of sway.
3. Adjust the cymbal pad position with the wing nut 4.


**Note:**

- Put the cymbal on the cymbal adapter and locate the tap of the adapter in the slot of the cymbal bottom.

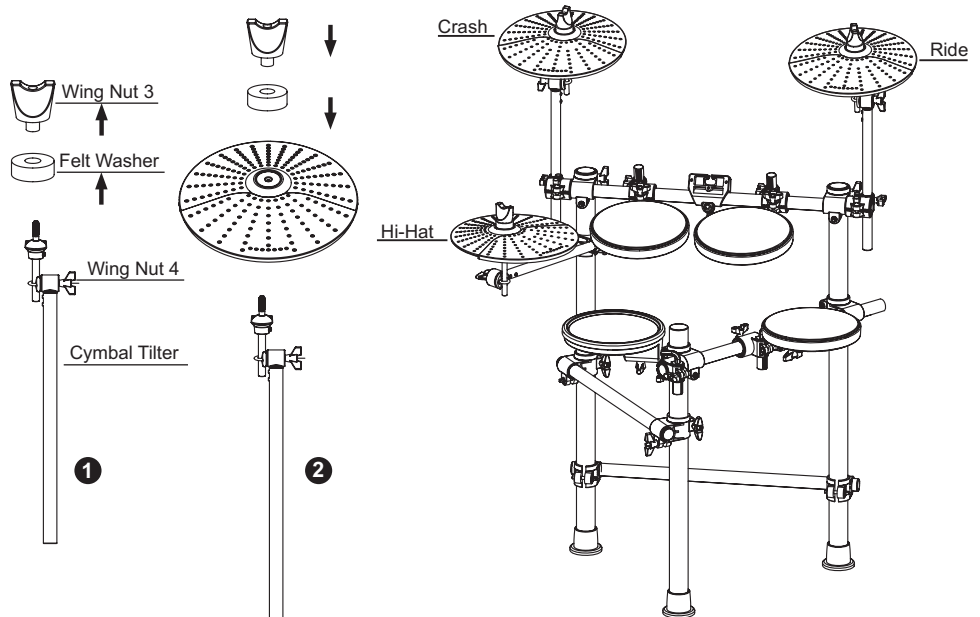


#### Attach the AFI

Insert the AFI position as shown.

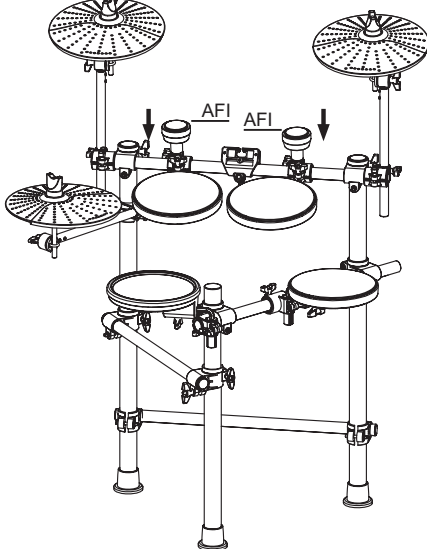

#### Attach the Drum Module

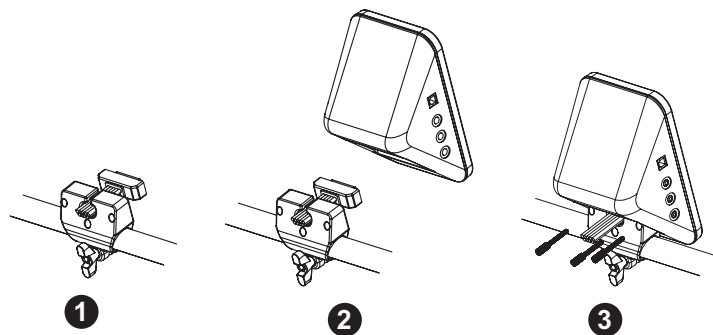

1. Push the cable into the mount holder slot on Center Pipe (1) as shown.
2. Connect cable to the DB25 Jack on the back of drum module.
3. Attach the module to the mount holder on the Center Pipe (1), and firmly tighten with the screws.



**Note:**

- Adjust the drum module position by moving the mount holders as needed, and firmly tighten the relevant wing nut.

## 4 Connect the Pads to the Drum Module

### Connection Procedure


Make connections as shown in the illustration.

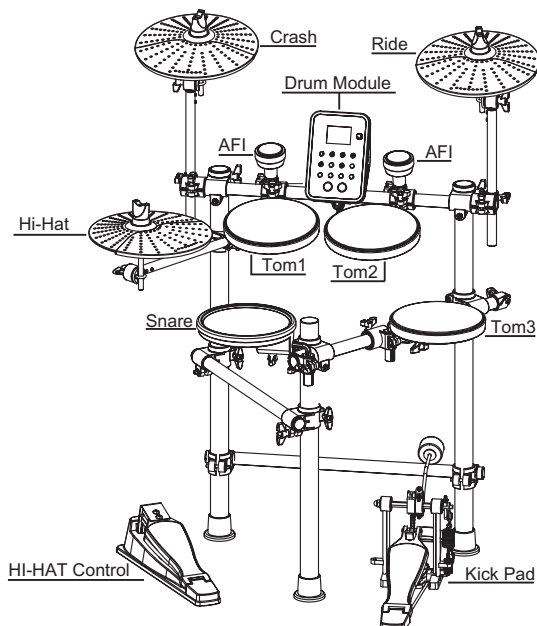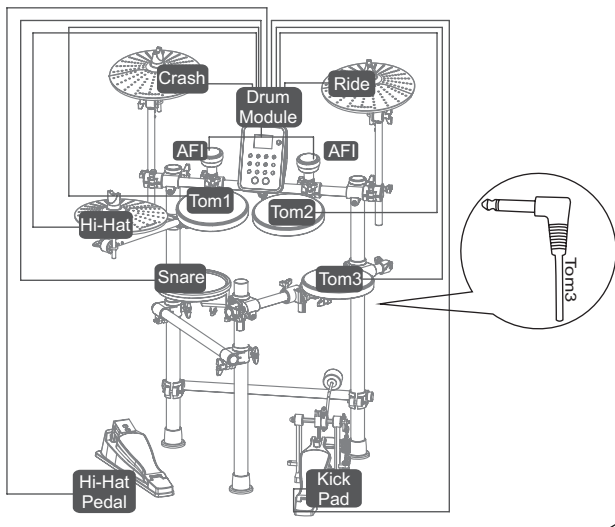

1. Place the kick on the floor in the center of the rack as shown.
  2. Place the hi-hat pedal on the floor on your left side.
  3. Connect the pads to the drum module with the marked cables.
- Are you ready? Let's enjoy playing it.**


## 5 Folding Drum Rack

### Unfolding Drum Rack

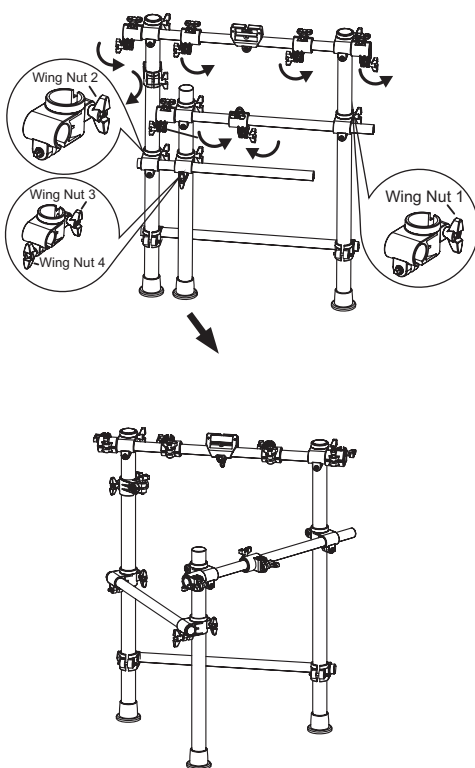

1. Loosen the wing Nut 1 ~ 4, Pillar (M) in the direction of arrow to appropriate location
2. Clamp turn to position as shown in figure 2, Complete the drum rack

### Folding Drum Rack

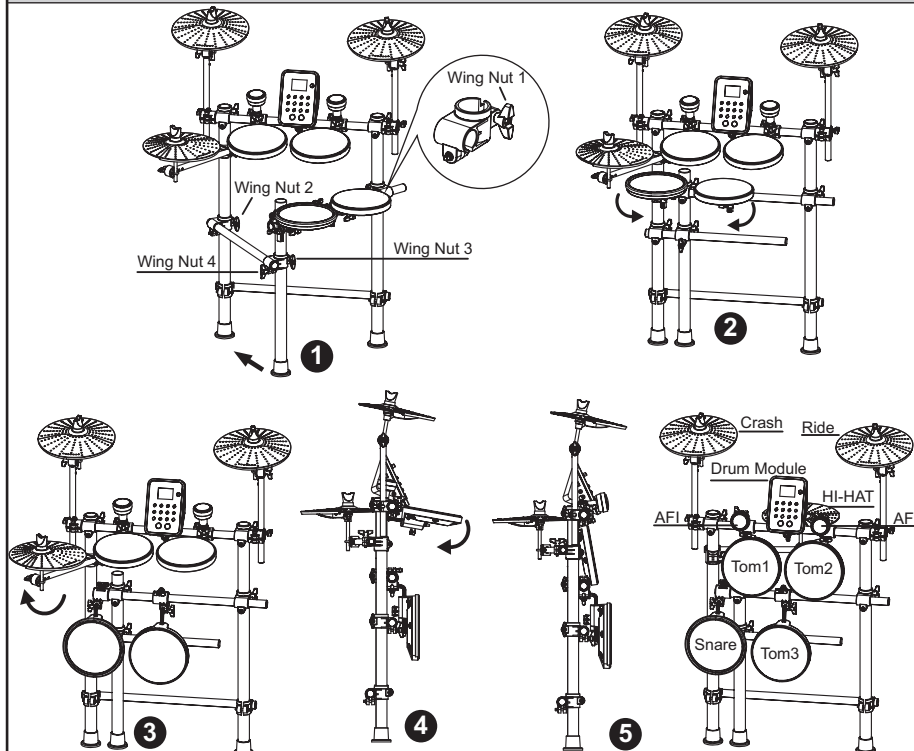

Drum rack through five steps can be completed folding.

1. Adjust the snare position as shown in figure 1.
2. Loosen 4 wing nut as shown in figure 1, push pillar (M) in the direction of arrow to fold as shown in figure 2.
3. Push down Snare/TOM3 in the direction of arrow down to as shown in figure 3.
4. Turn back HI-HAT Cymbal in the arrow direction as shown in figure 3, 4.
5. Push down TOM1/TOM2 in the direction of arrow down to as shown in figure 5, Drum rack be completed folding.